


# Ultraminiature Surface Mount Slide Switches *New!*

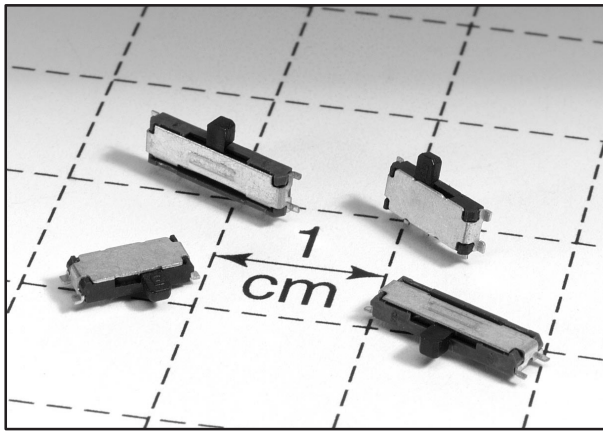

## Features/Benefits

- Ultraminiature surface mount
- Low profile
- SPDT & DPDT models

## Typical Applications

- Computer peripherals & network products
- Telecommunication products
- Test & measurement equipment

## Specifications

CONTACT RATING: 0.3A @ 6 VDC.  
 MECHANICAL LIFE: 10,000 cycles.  
 CONTACT RESISTANCE: 70 milliohms max.  
 INSULATION RESISTANCE: 100 milliohms min. @ 500V.  
 DIELECTRIC STRENGTH: 500 VAC min.  
 OPERATING TEMPERATURE: -10°C to +85°C.  
 SOLDERABILITY: 255°C max. solder temperature.  
 PACKAGING: Tape & reel.


## Materials

CASE: P.P.S.  
 COVER: SUS 301  
 SLIDER: Nylon 4/6  
 BRUSH: Copper alloy silver clad.  
 TERMINALS: Copper alloy tin, silver plated.

**NOTE:** Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.



SPDT

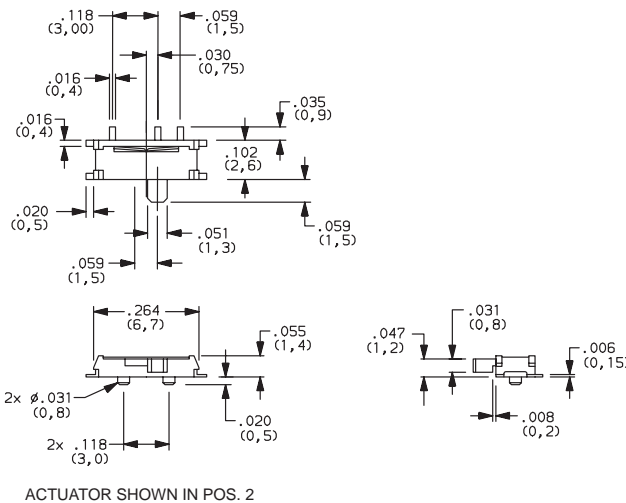

	SWITCH FUNCTION	
	POS. 1	POS. 2
	ON	ON
CONN. TERMINALS	1-2	2-3
SCHMATIC		
SPDT		

## PC MOUNTING

